



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification:</b> <b>C04B 38/02, C04B 24/00,</b> <b>C04B 38/10, C04B 103:30</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/61519</b> <b>(43) International Publication Date:</b> 19 October 2000 (19.10.2000)
<b>(21) International Application Number:</b> PCT/AU00/00301 <b>(22) International Filing Date:</b> 10 April 2000 (10.04.2000) <b>(30) Priority Data:</b> PP 9700 09 April 1999 (09.04.1999) AU <b>(60) Parent Application or Grant</b> JAMES HARDIE RESEARCH PTY LIMITED [/]; (). NAJL, Basil, Taha [/]; (). HINCZAK, Ihor [/]; (). IOWA, Valentin [/]; (). STITT, David, Malcolm [/]; (). NAJL, Basil, Taha [/]; (). HINCZAK, Ihor [/]; (). IOWA, Valentin [/]; (). STITT, David, Malcolm [/]; (). BALDWIN SHELSTON WATERS ; ()		<b>Published</b>
<b>(54) Title: CONCRETE FORMULATION</b> <b>(54) Titre: FORMULATION DE BETON</b>  <b>(57) Abstract</b> <p>An additive for use in the preparation of lightweight concrete, said additive including a blend of from around 40 % to 99 % of organic polymeric material and from 1 % to around 60 % of an air entraining agent. The additive is particularly suitable for the preparation of lightweight concrete which uses polystyrene aggregate. It provides for excellent dispersion of the polystyrene aggregate and improved bond between the polystyrene aggregate and surrounding cementitious binder. The resultant lightweight concrete formulation may be pumped and is particularly suitable for sandwich wall construction.</p> <b>(57) Abrégé</b> <p>Additif destiné à être utilisé pour préparer du béton léger, cet additif comprenant un mélange formé d'environ 40 % à 99 % de matière polymère organique et de 1 % à environ 60% d'un agent d'entraînement de l'air. L'additif est particulièrement approprié pour préparer un béton léger à base d'agrégat de polystyrène. Il assure une excellente dispersion de l'agrégat de polystyrène et une liaison améliorée entre l'agrégat de polystyrène et le liant à base de ciment qui se trouve à proximité. La formulation résultante de béton léger peut être pompée et est particulièrement adaptée à la construction de murs-sandwich.</p>		

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>C04B 38/02, 38/10, 24/00 // 103:30</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/61519</b> (43) International Publication Date: 19 October 2000 (19.10.00)
(21) International Application Number: <b>PCT/AU00/00301</b> (22) International Filing Date: 10 April 2000 (10.04.00) (30) Priority Data: PP 9700 9 April 1999 (09.04.99) <b>AU</b> (71) Applicant (for all designated States except US): <b>JAMES HARDIE RESEARCH PTY LIMITED [AU/AU]; 2nd floor, 1 Grand Avenue, Camellia, NSW 2142 (AU).</b> (72) Inventors; and (75) Inventors/Applicants (for US only): <b>NAJI, Basil, Taha [AU/AU]; 4/11-15 King Street, Parramatta, NSW 2150 (AU). HINCZAK, Ihor [AU/AU]; 103 Anderson Avenue, Mt Pritchard, NSW 2170 (AU). IOWA, Valentin [AU/AU]; 114 Eric Street, Bundeena, NSW 2230 (AU). STITT, David, Malcolm [AU/AU]; 14 Greville Street, Chatswood, NSW 2067 (AU).</b> (74) Agent: <b>BALDWIN SHELSTON WATERS; 60 Margaret Street, Sydney, NSW 2000 (AU).</b>	(81) Designated States: <b>AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</b>  <b>Published</b> <i>With international search report.</i>	
(54) Title: <b>CONCRETE FORMULATION</b>		
(57) Abstract <p>An additive for use in the preparation of lightweight concrete, said additive including a blend of from around 40 % to 99 % of organic polymeric material and from 1 % to around 60 % of an air entraining agent. The additive is particularly suitable for the preparation of lightweight concrete which uses polystyrene aggregate. It provides for excellent dispersion of the polystyrene aggregate and improved bond between the polystyrene aggregate and surrounding cementitious binder. The resultant lightweight concrete formulation may be pumped and is particularly suitable for sandwich wall construction.</p>		

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

5  
TITLE: CONCRETE FORMULATION

## FIELD OF THE INVENTION

10 The present invention relates to lightweight concretes and particularly but not only to lightweight concretes for use as core infill for sandwich panel walling.

## 15 5 BACKGROUND OF THE INVENTION

The technology involved in producing and pumping lightweight concrete is well known in the prior art. It can generally be achieved using two types of density modifiers, namely foam and lightweight aggregate.

20 Foamed concrete is made by introducing a water-based, gas-filled foam into a paste that is typically formed with water and Portland cement alone or Portland cement with a fine, lightweight aggregate. The foam structure is developed by adding a gas-generating chemical to the Portland cement paste, or by mixing a pre-formed, water-based foam into the cement paste to achieve a density below 1000 kg/m<sup>3</sup>.

25 The latter method requires that Portland cement be mixed with a pre-formed aqueous foam that is produced using a commercial foaming agent, such as a hydrolysed protein. This approach requires a foam generator on site to make the foam.

30 Correct ratios of foam to concrete, particularly at the job site, are difficult to maintain. This difficulty can lead to the possibility of non-uniformity of the final foamed concrete produced, as well as variable mix quality, pumpability, extrudability, and finishing characteristics. The problems are exacerbated by the fact that the foam begins to collapse from the moment it is formed since the foam is not self-generating.

35 Lightweight aggregate concrete, made by mixing lightweight aggregate such as expanded polystyrene, perlite and vermiculite together with a mortar is mainly targeted

5 at applications with concrete density above  $1000 \text{ kg/m}^3$ . Difficulties arise, however, in  
mixing the cementitious slurry and the lightweight aggregate due the tendency of the  
10 aggregate to clog and segregate because of its inherent composition and low specific  
gravity.

5 To make such polystyrene concrete pumpable, it may be necessary to increase the  
15 water content in the mix to overcome friction in the pipes. This tends to aggravate the  
segregation and clogging problems associated with lightweight aggregate concrete  
20 production.

Such lightweight concretes ie. foamed concrete and lightweight aggregate  
10 concrete have been used as core infill for sandwich panel walling but are subject to  
25 certain difficulties.

Foamed concrete exhibits a high hydrostatic pressure during core filling which  
30 sometimes necessitates the use of structural formwork bracing during core-filling of  
sandwich walls. The mix may also collapse heavily during pumping and pouring from  
15 the top of the wall height down into the wall cavity.

35 As far as lightweight aggregate concrete is concerned, core infill needs to exhibit  
a density of  $1000 \text{ kg/m}^3$  or below, which is outside the normal density range for  
lightweight aggregate concrete. To achieve this, up to  $1 \text{ m}^3$  of bulk lightweight  
40 aggregate volume per  $1 \text{ m}^3$  of mix is needed to be incorporated in the mix. This leads  
20 to difficulties in the coatability of lightweight aggregates due to the insufficient mortar  
45 volume present which consequently results in poor mix homogeneity and insufficient  
bond between the mix constituents.

5 The inclusion of air-entraining agents (AEAs) to improve freeze/thaw durability,  
aid pumpability, improve workability, and lower the density of concrete has long been  
10 practiced in the art. The AEA dose was normally specified to range between 5% to 9%  
air volume in the mix, with air content limit set to a maximum of 22% by ASTM C-

5 150. Air contents higher than this were normally avoided, especially in pumped  
15 concrete, for a range of reasons including:

during pumping a highly air-entrained concrete, the air bubbles tend to break  
20 upon impact with the pipe walls, joints elbows, forms, and the like which leads to  
variable air contents in the placed concrete;

10 the pumping stroke can be absorbed by the compressible air enclosed by the  
25 pipeline, leading to pumping failure;

the compressibility of excessive air during pumping will reduce its effectiveness  
30 as a workable medium and make it more difficult to place;

excessive air in the mix can cause the placed wet concrete to collapse due to the  
15 instability of the air-void system; and

35 highly air entrained concrete can lead to excessive reduction in the strength of the  
hardened product.

40 It is an object of the present invention to overcome or ameliorate one or more of  
the disadvantages of the prior art, or at least to provide a commercially useful

20 alternative.

5

10

15

20

25

30

35

40

45

50

55

## DISCLOSURE OF THE INVENTION

Accordingly, in a first aspect, the invention provides an additive for preparing lightweight concrete, said additive including a blend of around 40 to 99% of organic polymeric material and from 1 to around 60% of an air entraining agent.

In another aspect, the invention comprises a lightweight concrete formulation including one part of cementitious binder, 0.5 to around 1.5 parts by volume of inert filler, 2 to around 6 parts by volume of lightweight aggregate per part by volume of cementitious binder and up to around 2% by weight of the additive.

The additive allows the production of lightweight concrete mix containing preferably up to around 60% entrained air volume. Ideally, the concrete mix contains between 25% and around 50 % entrained air volume. This ultra high content is not normally used in concrete mixes due to the difficulty in controlling the mix. Such a high air entrainment level normally also provides difficulties in workability, consistency in density and tendency to collapse, particularly if pumped vertically or at high pressures.

The concrete produced from the abovementioned cement formulation, may range in density up to  $1200\text{kg/m}^3$ , however, the improved air stability provided by the blend additive allows the production of a lightweight concrete with a density well below  $1000\text{kg/m}^3$  eg.  $450\text{--}650\text{kg/m}^3$  with less lightweight aggregate volume than in conventional mixes of comparable density. By way of comparison, in one embodiment the use of the blend additive has allowed the polystyrene bulk volume in a  $1\text{m}^3$  of mix to be reduced from around  $1\text{m}^3$  to around  $0.7$  to  $0.8\text{m}^3$ . This reduction also results in better coatability of the polystyrene aggregate (i.e. helps ensure that the entire surface of each

- 5 -

bead is covered), improved mix workability, and improved bond between the lightweight mortar component and the polystyrene component in the mix.

In one preferred form of the invention, the lightweight concrete produced by using the blend additive may be used as core infill in sandwich walling applications without the need for internal or external vibration, or formwork bracing. It also enables the use of nail-fixing of fibre reinforced cement facing sheet onto the steel framing members without excessive bowing or blow out.

Preferably, the proportion of organic polymeric material in the additive is between 60 and around 90% and more preferably between 70 and around 85%.

Preferably there is between 10 and around 50% of the air-entraining agent in the blend and more preferably between 20 and around 40%.

A broad range of organic polymeric materials may be used in the blend.

Preferably the organic polymer will comprise one or more thixotropic agents which either dissolve in water or which at least form colloidal dispersions in the presence of water to produce an increase in viscosity. Suitable organic polymeric materials include cellulose derivatives such as hydroxymethylcellulose, hydroxyethyl cellulose or hydroxy propyl methyl cellulose; polysaccharides such as starches or alginate; and synthetic hydrophilic polymers and copolymers such as polyvinyl alcohol, polyethylene oxide or polypropylene oxide.

Any suitable air entraining agents may be used. The term air entraining agent refers to surface active agents (surfactants) which act to entrain air in the composition as it is mixed with water and/or pumped. Suitable air entraining agents include one or



5 more nonionic, cationic and anionic surfactants such as sodium salts of alpha olefin  
sulphonates and sodium lauryl sulphate or sulphonate.

10 The additive may be mixed with a broad range of cementitious binders which  
include all inorganic materials comprising compounds of calcium, aluminium, silicon,  
5 oxygen and/or sulphur which exhibit hydraulic activity ie. set solid and hard in the  
15 presence of water. Well known cements of this type include common Portland  
cements, fast setting or extra fast setting, sulphate resisting cements, modified cements,  
20 alumina cements, high alumina cements, calcium aluminate cements and cements  
which contain secondary components such as fly ash, pozzolana and the like. The term  
10 "cementitious binder" includes other well known binders such as fly ash, slag etc. and  
25 mixtures thereof with Portland cement.

Suitable lightweight aggregates are also well known in the art. They include a  
30 range of natural and synthetic lightweight aggregates such as perlite, vermiculite and  
expanded polystyrene. The expanded polystyrene may be in the form of balls, beads,  
15 pellets or reclaimed particles.

35 The lightweight concrete may also include between 50 and 100% by weight of  
the cementitious binder of an inert densifying ingredient in particulate form or an inert  
40 particulate material. The term "inert particulate material" indicates a material being  
inert with regard to other components of the composition, having a density greater than  
20 the lightweight aggregate and less than 5 mm in size. The preferred inert particulate  
45 material is natural masonry sand.

In a further aspect, the present invention provides a method of constructing a  
50 wall comprising the steps of providing a frame having a plurality of substantially

5 parallel mutually spaced apart frame members, attaching facing sheets to said frame  
and filling the cavity formed between said facing sheets with a lightweight concrete, the  
10 lightweight concrete comprising a cementitious binder, a lightweight aggregate and up  
to 2% of an additive comprising a blend of 40-99% of organic polymeric material or  
5 combination thereof and 1-60% of air entraining agents.

15 In still a further aspect, the present invention provides a method for forming a  
pumpable lightweight concrete mix comprising the steps of firstly mixing the additive  
with water to form an aqueous solution, secondly adding expanded polystyrene  
20 aggregate to the aqueous solution and thereafter adding cementitious binder.

10 Further unexpected benefits arise particularly when polystyrene is used as a  
25 lightweight aggregate filler material. There is a known problem with polystyrene in  
this context, in that the individual particles tend to develop electrostatic surface  
charges. This causes the aggregates to clump together and float to the top of the mix in  
30 situ, giving rise to uneven distribution, compromised structural integrity, and largely  
negating the intended effect. In order to overcome this problem, it is usually necessary  
15 to pretreat the polystyrene aggregates in order to neutralise them. This requires  
additional chemicals, a separate process step, and often a subsequent drying process as  
35 well. However, the applicant has found that by use of the above defined additive, this  
problem of clumping can be avoided. In this regard, the additive is initially mixed with  
40 water to form an aqueous solution, and the polystyrene is then added to this solution.  
Unexpectedly, this has been found to neutralise the surface charge on the polystyrene,  
45 without any additional chemicals or process steps being required. The solid  
components are then added to the mix as a final step. By obviating the need for a  
50

5 separate pretreatment process for the polystyrene aggregates, substantial material cost savings and production efficiencies can be realised.

10 Another advantage arising from the present invention when used in conjunction with polystyrene lightweight aggregate is the bond strength between the polystyrene  
5 and concrete. For reasons that are not entirely understood, the polystyrene does not  
15 normally bond well with a cementitious binder. It is suspected that this may be due to the hydrophobic nature of the polystyrene aggregate. Not wishing to be bound by any particular theory, the applicant has found that use of the additive defined above also  
20 increases the bond strength between the polystyrene aggregate and the surrounding cementitious binder. This may be due to the polystyrene aggregate being rendered  
25 hydrophilic or other mechanisms which cannot at this time be fully analysed. In any event, as will be discussed below there is a substantial improvement in the bond strength between the polystyrene lightweight aggregate and surrounding cementitious material.

15 Unless the context clearly requires otherwise, throughout the description and the claims, the words 'comprise', 'comprising', and the like are to be construed in an  
35 inclusive as opposed to an exclusive or exhaustive sense; that is to say, in the sense of "including, but not limited to".

#### 40 BEST MODE FOR CARRYING OUT THE INVENTION

20 So that the present invention may be more clearly understood it will now be described with reference to the following examples.

Example 1-3 describes various mixtures of lightweight concrete using polystyrene aggregate, perlite and vermiculite as lightweight aggregate and sand and fly ash as fillers.

Example 1: Use of EPS as lightweight aggregate and sand as filler.

<i>Mix Ingredients</i>	<i>Quantity</i>	<i>Unit</i>
• Cement	50	kg
• Sand	40	kg
• Polystyrene Aggregate (50% solid/bulk ratio)	200	litres
• Water	35	litres
• Blend: Air Entrainment (Anionic Surfactant)	0.1%	by wt. of cement
Organic polymer	0.3%	by wt. of cement
• Density of fresh mix	500	kg/m <sup>3</sup>
• Yield of fresh mix	250	litres
• % Entrained Air	30%	

Example 2: Use of polystyrene as lightweight aggregate and fly ash + sand as filler.

<i>Mix Ingredients</i>	<i>Quantity</i>	<i>Unit</i>
• Cement	30	kg
• Sand	20	kg
• Fly Ash	45	kg
• Polystyrene Aggregate (50% solid/bulk ratio)	225	litres
• Water	45	litres
• Blend: Air Entrainment (Anionic Surfactant)	0.1%	by wt. of cement
Organic polymer	0.3%	by wt. of cement
• Density of fresh mix	500	kg/m <sup>3</sup>
• Yield of fresh mix	280	litres
• % Entrained Air	30%	

Example 3: Use of Perlite as lightweight aggregate.

<i>Mix Ingredients</i>	<i>Quantity</i>	<i>Unit</i>
• Cement	40	kg
• Sand	40	kg
• Perlite (50% solid/bulk ratio)	40	litres
• Water	30	litres
• Blend Air Entrainer (Anionic Surfactant)	0.3%	by weight of cement
Organic polymer	0.3%	by weight of cement
• Density of fresh mix	700	kg/m <sup>3</sup>
• Yield of fresh mix	160	litres
• % Entrained Air	50%	

Comments on Examples 1-3

The mixes prepared according to those recipes were pumped into the cavities of a number of fibre reinforced cement lined sandwich walls, 2400 mm x 2400 mm x 75 mm in size. Upon observation, it was found that the mixes were:

- Pumpable, i.e. no clogging of line or segregation of mix was observed.
- Stable, i.e. the air-entrained mix sustained its level in the wall cavity and did not collapse.

The YIELD of the fresh mix means the volume of the mix produced in one batch. It is important that this yield is maintained after pumping and placing of the concrete, which indicates the stability of the mix.

The density of the FRESH mix means the density of the concrete before setting, which is the one most critical to the application of wall core filling.

Examples 1 and 2:

Air Entrainer                      sodium lauryl sulphate

Organic Polymer hydroxypropyl methylcellulose

Example 3:

Air Entrainer Myristamine Oxide

Organic Polymer hydroxypropyl methylcellulose

The applicant has found that when the blend additive is used to produce a lightweight aggregate concrete, the resultant mix has similar pumpability performance to that of a conventional lightweight aggregate mix.

Example 4 below compares the pumpability performance of two lightweight concrete mixes, one with air entrainment and one without, containing a similar volume of polystyrene aggregate. Sixteen batches of each mix were produced, pumped to the 8<sup>th</sup> floor and used for core-filling of sandwich walls lined with FRC facing. The two mixes were run back-to-back to minimise site, equipment and human interference with the core filling rates produced. It can be seen that the core filling rates corresponding to each mix, taken as core-filled area (m<sup>2</sup>) divided by pumping time (hrs), were comparable.

Example 4: Pumpability performance of lightweight aggregate (polystyrene) concrete with and without air-entrainment.

Mix Ingredients	Non Air-entrained Conventional Mix	Air-entrained Mix
MIX DESIGN		
• Cement	50 kg	50 kg
• Sand	90 kg	45 kg
• Polystyrene Aggregate	150 litres	200 litres
• Water	37 litres	35 litres

• Blend Air Entrainer (Anionic Surfactant)	nil	0.1% by wt. of cement
Organic polymer (Cellulose ether)	nil	0.3% by wt. of cement
• % Entrained Air (calculated from yield and density measurements)	2%	25%
• % Polystyrene aggregate (calculated from yield and density measurements)	47%	47%
AT MIXING STATION		
• Density of fresh mix	1075 kg/m <sup>3</sup>	525 kg/m <sup>3</sup>
• Yield of fresh mix	170 litres	240 litres
• Mixing/pumping time (16 batches)	100 minutes	75 minutes
ON THE 8 <sup>TH</sup> FLOOR		
• Density of fresh mix	1100 kg/m <sup>3</sup>	575 kg/m <sup>3</sup>
• Loss in yield	2%	9%
• Wall core-filling rate	28.8m <sup>2</sup> /hr	26.4m <sup>2</sup> /hr

Clearly better mix pumpability resulted from inclusion of the blend additive in the mix which led to reduced friction in the pipes. Also, less clogging of the pipes will be experienced due to improved mix homogeneity, better coatability of beads and its segregation-free characteristic.

The applicants have found that the lightweight aggregate concrete resulting from use of the blend additive provides not only substantially lower density but enables reduced hydrostatic pressure and dynamic thrust during core filling.

#### 10 Example 5: Extent of bowing comparison in core-filled walls.

The two mixes shown in example 4 were pumped into a 400 mm wide, 2.4 m high wall cavity and the central deflection (bowing) on the 6 mm fibre reinforced cement (FRC) facing sheet during the core filling was measured using Linear Voltage Displacement Transducers (LVDTs). They are shown in the table below:

<i>Lightweight Concrete Mix</i>	<i>Deflection at 300 mm from wall base</i>	<i>Deflection at 600 mm from wall base</i>
Conventional 1000 kg/m <sup>3</sup> mix	4.00 mm	3.8 mm
Air-entrained 500 kg/m <sup>3</sup> mix	1.7 mm	1.6 mm

From the deflection measurements outlined above it can be seen that the air-entrained 500 kg/m<sup>3</sup> density mix enables around a 50% reduction in the bowing of FRC facing when used as core infill in lieu of the conventional 1000 kg/m<sup>3</sup> density mix.

Example 6: Dynamic thrust comparison in core-filled walls.

The two mixes shown in example 4 were pumped into a 400 mm wide, 2.4 m high wall cavity, and the dynamic response (thrust) during core filling was measured using an accelerometer mounted near the wall base (Figures 1 & 2 below). It can be seen that the lightweight concrete (air-entrained) mix exhibited significantly less dynamic thrust compared with the conventional polystyrene aggregate non-air-entrained mix.

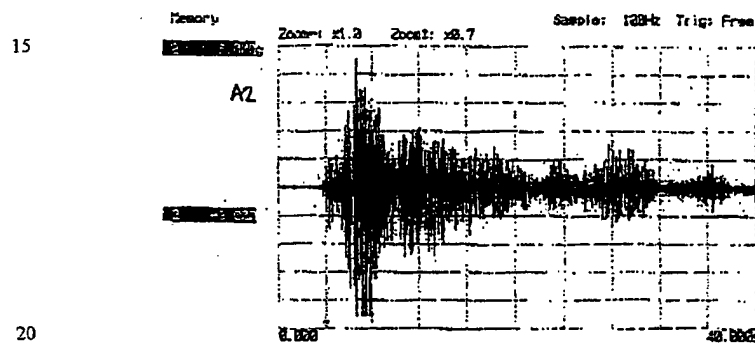


Figure 1 Dynamic response of conventional mix - 1100 kg/m<sup>3</sup> density



- 14 -

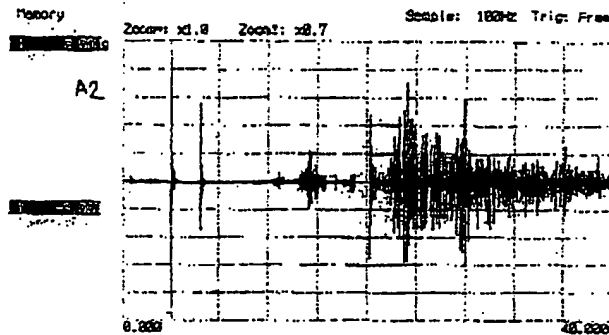


Figure 2 Dynamic response of air-entrained mix - 500 kg/m<sup>3</sup> density

The reduced hydrostatic pressure exemplified in example 6 has significant advantages over the prior art. It enables elimination of the need for external formwork bracing to control bowing and blow-out of the wall panel. It also enables quicker construction since a nail gun may be used to fix the fibre reinforced cement facing sheets to the frame rather than screw fixing. Reduced hydrostatic pressure and dynamic thrust during core filling also enables the use of lighter gauge steel framing due to less stiffness/torsional requirements.

A number of other surprising and unexpected benefits have been found to flow from the present invention including improved homogeneity of the resultant lightweight aggregate concrete. The lightweight mix is free flowing, self levelling, segregation free and can be used to fill, for example, the cavity in a sandwich wall without the need to consolidate the mix by internal vibration or external tapping.

5

- 15 -

Example 7: Moisture retention comparison.

10

The two mixes shown in example 4 were poured into 2400 mm x 1200 mm x 75 mm walls constructed using studs of the same gauge at the same pitch and allowed to cure at ambient conditions for two weeks. The walls were then transferred to a drying cell where they were subjected to 20 cycles of 360 minute duration with half the time at ambient temperature and the other half at 45°C. This was followed with a further 10 cycles of 60 minutes of heating at 70°C and 10 minutes at ambient temperature. After the drying exposure, core samples were taken and the moisture content of each wall was determined at a similar location in each wall.

15

20

25

The results of the moisture analysis revealed that the lightweight concrete (air-entrained) mix retained 9.38% moisture compared to 5.13% moisture in the conventional polystyrene aggregate non-air entrained mix. This indicates that, even after severe prolonged drying, the lightweight mix according to this invention exhibits water retention capability up to almost double the moisture retained in the conventional mix.

30

35

From the above, it can be seen that the lightweight concrete mix exhibits superior water retention capability compared with conventional lightweight (polystyrene) concrete. This limits the volume of water liberated by the mix within the wall cavity, resulting in reduced wetting of the fibre reinforced cement facing sheets.

40

20

45

Consequently, the facing sheets suffer less degradation in their structural properties. In particular, their stiffness and screw holding capacity are maintained, leading to less bowing and blow-out during core filling. Also, drier sheets lead to lessened and more

50

55

progressive shrinkage of the sheet as the wall dries. This causes less strain (less opening) at the jointed gaps between the sheets.

Another outcome of the effect of improved water retention of the core mix is the reduced joint degradation due to the reduced volume of excess free water coming from the mix and diffusing through the joints. This enables better adhesion of the base compound and less damage to and distortion of paper jointing tape extending between adjacent facing sheets. Also, drier joints enable quicker and earlier jointing of walls on site and reduced degradation from any alkali dissolved in the cement water permeating into the jointing zone.

Example 8: Bond strength comparison.

The walls subjected to drying in example 7 were tested for bond strength between the fibre reinforced cement facing sheets and the two mixes outlined in example 4.

This was achieved by applying a tensile force to the FRC/core interface at different wall levels along its height. The results are shown in the table below:

Test location along wall height	Bond Stress (MPa)			
	Conventional 1100 kg/m <sup>3</sup> mix	Failure Mode	Air-entrained 500 kg/m <sup>3</sup> mix	Failure Mode
300 mm	0.12	Adhesive	0.14	Cohesive
900 mm	0.07	Adhesive	0.11	Cohesive
1800 mm	0.08	Adhesive	0.08	Cohesive
2100 mm	0.00	Adhesive	0.06	Cohesive

It can be seen that, upon cyclic drying, the air-entrained mix exhibited less degradation in bond strength compared with the conventional lightweight mix. It can also be noted that the two mixes exhibited distinctly different failure modes. The

conventional mix failed in an "adhesive" manner, i.e. by separation of the FRC component from the core along their interface. The air-entrained mix, on the other hand, failed in a "cohesive" manner, i.e. the FRC/core interface remained bonded and the failure occurred in the core.

From the above, it can be seen that the lightweight mix according to the present invention exhibits superior adhesion to the fibre reinforced facing sheets. That is to say, the composite strength of sheet/concrete/sheet is improved which leads to improvement in the overall performance characteristics of the sandwich wall. This is quite surprising since there was nothing to suspect that the additive or process for producing the lightweight concrete formulation would exhibit such superior adhesion. It will be clear to persons skilled in the art that such "cohesive" failure is a substantial improvement over and above conventional techniques.

Example 9: Anchor pull out comparison.

The walls subjected to drying in example 7 were tested for their anchor pull out load capacities. Anchor holes were drilled and two types of anchors were inserted in both walls and tested by applying an axial load to the bolt head until a peak load was reached defining anchor yielding. The results are shown in the table below:

Anchor Type	Pull out Load (KN)	
	Conventional 1100 kg/m <sup>3</sup> mix	Air-entrained 500 kg/m <sup>3</sup> mix
HILTI HGN 12 (Ø10 mm Bolt size)	2.11	0.71
HILTI HHD 6/19 (Ø6 mm Bolt size)	0.90	1.30

5

- 18 -

10

15

It can be seen that when an anchor intended for conventional lightweight concrete was used, i.e. the HILTI HGN 12, the air-entrained mix exhibited 65% lower pull out load compared with the conventional mix. Since this anchor relies on core density to achieve its pull out load characteristic, the fact that the lightweight concrete is 55% lower in density translates into reduced tensile strength and consequently reduced pull out strength.

20

25

30

35

On the other hand, when a cavity wall anchor HILTI HHD 6/19 was used, the table shows that the pull out force trend relating to the two mixes was reversed, i.e. the air-entrained mix exhibited 44% higher pull out load compared with conventional mix. This result is believed to be related to the improved bond strength of the air-entrained mix which helps transfer the pull out forces directly to the facing sheet, due to the presetting action required by the anchor prior to its being loaded. When the HHD type anchor is set, the body is collapsed into four radially oriented arms that come into contact with the facing skin. In short, the carrying capacity/density ratio of the core mix is substantially improved.

40

45

This result is quite surprising. Not only does the lightweight concrete provide good insulation due to high entrained air volume, but at the same time it meets acceptable hanging capacity requirements needed for hanging basins, cupboards, and the like.

20

#### Example 10: Density Modification

50

55

Typical formulations for lightweight concrete with densities of  $1200\text{kg/m}^3$  and  $450\text{kg/m}^3$  are shown. Both examples showed excellent dispersion and bond strength with the polystyrene aggregate.

Mix Density			1200	1200
	Litres	Kg	Ratio by vol.	Ratio by wt.
Binder	253	354	100.00%	100.00%
Inert Filler	394	630	155.56%	177.78%
Poly Aggregate	295	3	116.67%	0.83%
Water	211	211	83.46%	59.61%
Additive	7	2	2.72%	0.68%
Mix Density			450	450
	Litres	Kg	Ratio by vol.	Ratio by wt.
Binder	108	151	100.00%	100.00%
Inert Filler	95	151	87.50%	100.00%
Poly Aggregate	946	9	875.00%	6.25%
Water	140	140	129.85%	92.75%
Additive	6	2	5.25%	1.31%

In all these respects, the invention represents a practical and commercially significant improvement over the prior art.

Although the invention has been described with reference to specific examples it will be appreciated to those skilled in the art that the invention may be embodied in many other forms.

**Claims**

5

10

15

20

25

30

35

40

45

50

55

5

- 20 -

## CLAIMS

10

1. An additive for use in the preparation of lightweight concrete, said additive including a blend of around 40% to 99% of organic polymeric material and 1% to

5 around 60% of an air entraining agent.

15

2. An additive according to claim 1, including between 10% and around 50% of the air entraining agent.

20

3. An additive according to claim 2, including between 20% and around 40% of the air entraining agent.

10 4. An additive according to any one of claims 1 to 3, wherein the organic polymeric material includes one or more thixotropic agents to enhance viscosity.

25

5. An additive according to any one of claims 1 to 4, wherein the organic polymeric material is a cellulose derivative, a polysaccharide, or a synthetic hydrophilic polymer.

30

6. An additive according to claim 5, wherein the organic polymeric material is  
15 selected from a group consisting of hydroxymethylcellulose, hydroxyethyl cellulose,  
35 hydroxy propyl methyl cellulose, starch, alginate, polyvinyl alcohol, polyethylene oxide and polypropylene oxide.

40

7. An additive according to any one of claims 1 to 6, wherein the air entraining agent includes one or more nonionic, cationic or anionic surfactants.

20 8. An additive according to claim 7, wherein the air entraining agent is a sodium salt of alpha olefin sulphonate, or sodium lauryl sulphate or sulphonate.

45

9. An additive according to any one of claims 1 to 8, including between 60% and around 90% of the organic polymeric material.

50

55



10. An additive according to claim 9, including between 70% and around 85% of the organic polymeric material.

11. A treatment agent for polystyrene lightweight aggregate to be used in the preparation of lightweight concrete, said treatment agent comprising an aqueous

5 solution of an additive according to any one of claims 1 to 10.

12. A lightweight concrete formulation including around 1 part by volume of cementitious binder, 0.5 to around 1.5 parts by volume of inert filler, 2 to around 6 parts by volume of lightweight aggregate per part by volume of cementitious binder, and up to around 2% by weight of the additive according to any one of claims 1 to 11.

10 13. A lightweight concrete formulation according to claim 12, wherein the cementitious binder includes one or more compounds of calcium, aluminium, silicon, oxygen or sulphur, or compositions of Portland cement, sulphate resisting cement, modified cement, alumina cement, high alumina cement, calcium aluminate cement or cements containing secondary components including fly ash, pozzolana or slag.

15 14. A lightweight concrete formulation according to claim 12 or claim 13, wherein the lightweight aggregates include perlite or vermiculite.

15. A lightweight concrete formulation according to claim 12 or claim 13, wherein the lightweight aggregates include expanded polystyrene.

16. A lightweight concrete formulation according to claim 12 to 15, wherein between around 50% and 100% by weight of the cementitious binder includes an inert particulate material.

17. A lightweight concrete formulation according to claim 16, wherein the inert particulate material is natural masonry sand.

5

- 22 -

10

18. A lightweight concrete formulation according to any one of claims 13 to 16 wherein the cementitious binder is a blended cement comprising 10-90% by volume of Portland cement and 90-10% by volume of a mineral additive such as fly ash, slag, metakaolin, silica fume or the like.

15

5 19. A concrete mix including a lightweight concrete formulation according to any one of claims 12 to 18 and containing up to around 60% of entrained air volume.

20

20. A concrete mix according to claim 19 and containing between 25% and around 50% of entrained air volume.

25

21. A concrete mix according to claim 19 or claim 20, having an overall density of between around 1200kg/m<sup>3</sup> and around 450kg/m<sup>3</sup>.

30

22. A concrete mix according to claim 21, having an overall density of between 450 kg/m<sup>3</sup> and around 650kg/m<sup>3</sup>.

35

23. A method of constructing a wall comprising the steps of erecting a frame having a plurality of substantially parallel mutually spaced apart frame members, attaching facing sheets to said frame, and filling a cavity formed between said facing sheets with the lightweight concrete mix according to any one of claims 19 to 22.

40

24. A method of forming a pumpable lightweight concrete mix comprising the steps of firstly mixing an additive according to any one of claims 1 to 11 with water to form an aqueous solution, secondly adding expanded polystyrene aggregate to the aqueous

45

20 solution, and thereafter adding a cementitious binder.

50

25. A method according to claim 24, wherein the mix consists of:

1 part by volume of cementitious binder;

0.5 to 1.5 parts by volume nominal water;

0.5 to 1.5 parts by volume inert filler;

55

5

- 23 -

1 to around 9 parts by volume lightweight aggregate, and  
up to around 5% by volume of additive.

10

5

15

20

25

30

35

40

45

50

55

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00301

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
Int. Cl. <sup>7</sup> : C04B 38/02, 38/10, 24/00 // 103:30		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) C04B 38/02, 38/10, 24/00, 16/04// 103:30		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU: IPC as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPAT: (cellulos+ or hydroxy+ or polysaccharid+ or starch+ or alginat+ or polyvinyl+ or polypropylen+) and (air+ or gas+ or aca+ or acrat+ or entrain+)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 19540273 A (DENNERT PORAVER GMBH) 30 April 1997, see whole document	1-3, 5-7, 9-10, 12-14, 16-21, 23
X	EP 839774 A (DENNERT PORAVER GMBH) 6 May 1998, see whole document	1-3, 5-7, 9-10, 12-14, 16-21, 23
X	GB 2211183 A (COURTAULDS PLC) 28 June 1989 see whole document	1-3, 5-6, 9-10, 12-14, 16-19, 21-23
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 8 May 2000		Date of mailing of the international search report 23 MAY 2000
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaaustralia.gov.au Facsimile No. (02) 6285 3929		Authorized officer  JOHN DEUIS Telephone No : (02) 6283 2146

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00301

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9807667 A (SHULMAN) 26 February 1998, see pages 4, 7-8, examples and claims	1, 5-19, 21, 23-25

INTERNATIONAL SEARCH REPORT  
Information on patent family members

International application No.  
PCT/AU00/00301

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
DE	19540273	EP	857166	WO	9716392		
EP	839774	DE	19645231	NO	975043		
GB	2211183	NONE					
WO	9807667	AU	41562/97	EP	944558	US	5725652
		US	5580378	US	5622556		
END OF ANNEX							